

## Reading the EDM1 MK7C Single Phase Electricity




The EDM1 MK7C has built-in GSM communications which allows the register reads & half hourly consumption data to be remotely retrieved daily.

The LCD meter display automatically scrolls through the time, date and the register read or can be manually cycled by the SELECT button.

The number of registers displayed depends on the tariff to which the meter has been programmed. The meaning of each value is displayed in the bottom left-hand corner of the display.


**tInE** Current Time (usually GMT)

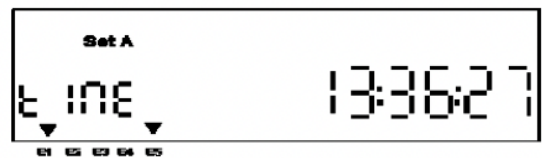


**dAtE** Current Date



**r1** Billing Register Rate 1 kWh  
(r2=Rate 2, r 3=Rate 3 may follow)

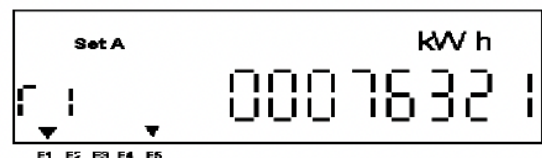

**t0** Total kWh

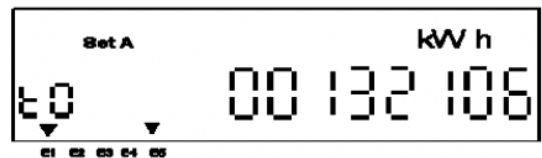

MD, Export, kVAh and kVArh registers are stored on Set B registers. They can be obtained by holding down the SELECT button for 3 seconds this switches the meter between Set A registers & Set B registers.